


PRODUCT DETAILS

Product Code	american-walnut
Construction	Engineered Tongue and Groove
Pattern	Herringbone Parquet
Top Layer Specie	American Walnut
Total Thickness	14mm
Finish	Lacquered,hardened using ultraviolet light
Grade	Character
Edge Profile	Micro-bevelled on all four sides



AMERICAN WALNUT LACQ

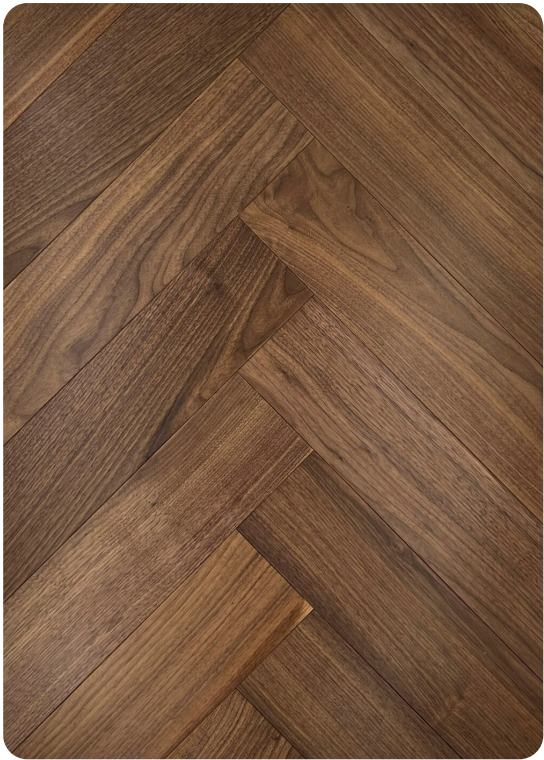

TECHNICAL CRITERIA

Wear Layer Thickness	4 mm American walnut
Backing	WBP European birch cross layer plywood
Width	160 mm; 180 mm; 220 mm
Length	60% (2000 - 2800 mm) / 40% (800-1980 mm)
Pack Size	Made to order

INSTALLATION METHODS

Connection System	Tongue & groove
UFH Suitability	Tested and compatible with underfloor heating system

IMPORTANT INSTALLATION GUIDANCE

Installation is taken as acceptance of the goods and must be carried out by a competent installer in accordance with the relevant national standard. Inspect all goods before fitting.

Do not cover a newly installed floor with non-breathable material. Trapped moisture can damage the surface, especially over underfloor heating.