

# TECHNICAL DATA SHEET


Engineered Chevron · Artisan Bespoke Chevron

## PRODUCT DETAILS

|                  |                                                                 |
|------------------|-----------------------------------------------------------------|
| Product Code     | Gold Sel-CH                                                     |
| Construction     | Engineered Tongue and Groove                                    |
| Pattern          | Chevron Parquet                                                 |
| Top Layer Specie | European oak                                                    |
| Total Thickness  | 15mm                                                            |
| Finish           | Hand-finished and fully protected with 4 layers of hard wax oil |
| Grade            | Select                                                          |
| Edge Profile     | Micro-bevelled on all four sides                                |



## GOLDEN SELECT CHEVRO

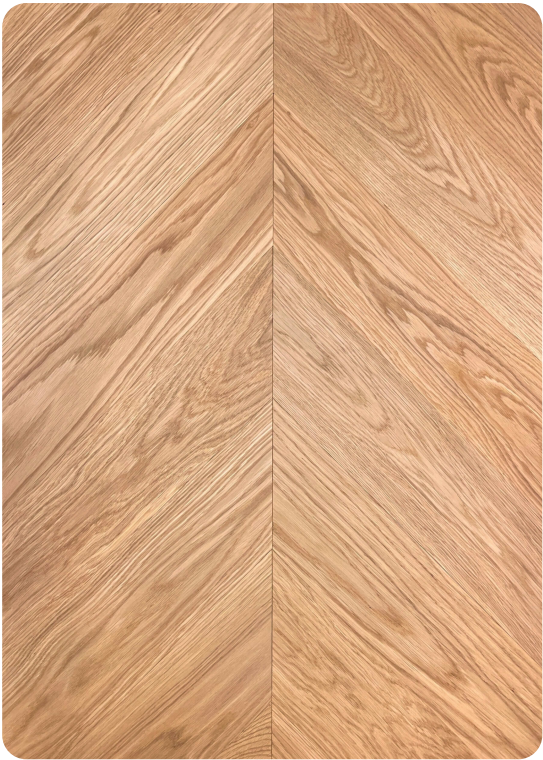

## TECHNICAL CRITERIA

|                      |                                                                          |
|----------------------|--------------------------------------------------------------------------|
| Wear Layer Thickness | 4mm European oak                                                         |
| Backing              | WBP European birch plywood or 3 Oak™ construction featuring European oak |
| Width                | 160 mm; 180 mm; 220 mm                                                   |
| Pack Size            | Made to order                                                            |

## INSTALLATION METHODS

|                   |                                                      |
|-------------------|------------------------------------------------------|
| Connection System | Tongue & groove                                      |
| UFH Suitability   | Tested and compatible with underfloor heating system |

## IMPORTANT INSTALLATION GUIDANCE

Installation is taken as acceptance of the goods and must be carried out by a competent installer in accordance with the relevant national standard. Inspect all goods before fitting.

Do not cover a newly installed floor with non-breathable material. Trapped moisture can damage the surface, especially over underfloor heating.